




## China 608zz Bearing Supplier

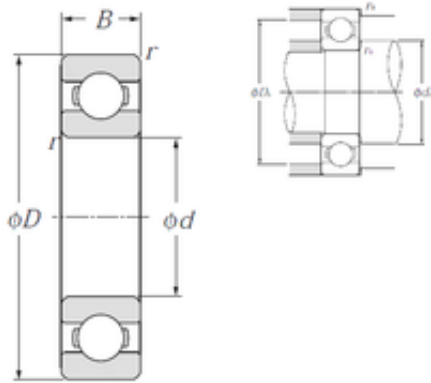

6328 Bearing 2D drawings and 3D CAD models

Cheap price NTN deep groove ball bearing 6328  
6330 6332 6334 6336 2RS ZZ LLU P0 precision  
NTN for Cyprus

Bearing No. 6328

Size	140x300x62 mm
Bore Diameter	140 mm
Outer Diameter	300 mm
Width	62 mm
d	140 mm
D	300 mm
B	62 mm
C	62 mm
r min.	4 mm
da min.	156 mm
Da max.	284 mm
ra max.	3 mm
Weight	18,5 Kg
Basic dynamic load rating (C)	253 kN
Basic static load rating (C0)	246 kN
(Grease) Lubrication Speed	2 200 r/min
(Oil) Lubrication Speed	2 600 r/min
rs min	4 mm
Radial clearance class	CN
Mass	18.5 kg
Dynamic load, C	253 kN
Static load, C0	246 kN
Fatigue limit load, Cu	7.5 kN
f0	13.6



## China 608zz Bearing Supplier

Nlim (oil)	2,600 rpm
Nlim (grease)	2,200 rpm
Min operating temperature, Tmin	-20 ° C
Max operating temperature, Tmax	120 ° C
Characteristic cage frequency, FTF	0.39 Hz
Characteristic rolling element frequency, BSF	4.4 Hz
Characteristic outer ring frequency, BPF0	3.13 Hz
Characteristic inner ring frequency, BRF1	4.87 Hz
da min	156 mm
Da max	284 mm
ra max	3 mm
Category	Single Row Ball Bearings
Inventory	0.0
Manufacturer Name	NTN
Minimum Buy Quantity	N/A
Weight / Kilogram	18.6
Product Group	B00308
Enclosure	Open
Precision Class	ABEC 1   ISO P0
Maximum Capacity / Filling Slot	No
Rolling Element	Ball Bearing
Snap Ring	No
Internal Special Features	No
Cage Material	Steel
Internal Clearance	C0-Medium
Inch - Metric	Metric
Long Description	140MM Bore; 300MM Outside Diameter; 62MM



## China 608zz Bearing Supplier

	Outer Race Width; Open; Ball Bearing; ABEC 1   ISO P0; No Filling Slot; No Snap Ring; No Internal Special Features; C0-Medium Internal Clearance; Steel Cage
Other Features	Deep Groove
Category	Single Row Ball Bearing
UNSPSC	31171504
Harmonized Tariff Code	8482.10.50.68
Noun	Bearing
Keyword String	Ball
Manufacturer URL	<a href="http://www.ntnamerica.com">http://www.ntnamerica.com</a>
Weight / LBS	40.8
Outside Diameter	11.811 Inch   300 Millimeter
Inner Race Width	0 Inch   0 Millimeter
Outer Race Width	2.441 Inch   62 Millimeter
Bore	5.512 Inch   140 Millimeter